



QUOTATION SHEET

Project name: 20 ft. container house (1 bathroom)					
Project dimension: 6058*2438*2896mm				Date: 3/28/2017	
Items	unit	qty.	unit price	amount	specification
<b>Container frame</b>					
welded container	pc	1.00			1) roof panel 2.0mm, wall panel 1.5mm, column 6mm 2) sea shipping standard painting 3) 18mm plywood for floor
<b>Roof</b>					
insulation	m <sup>2</sup>	14.40			75mm rock wool /120KG/m <sup>3</sup>
OSB board	m <sup>2</sup>	14.40			12mm
decoration board	m <sup>2</sup>	14.40			20mm eco-Wood ceiling
light	pc	2.00			LED light /32Wx2pcs , 8Wx1 pc
<b>Wall</b>					
insulation	m <sup>2</sup>	28.08			50mm rock wool/120KG/m <sup>3</sup>
OSB board	m <sup>2</sup>	28.08			12mm
inner wall panel	m <sup>2</sup>	28.08			20mm eco-Wood ceiling
<b>Floor</b>					
Wood floor	m <sup>2</sup>	14.40			12mm laminate floor
Skirting	m	30.80			H90mm PVC skirting
bottom insulation	m <sup>2</sup>	14.40			80mm PU spraying
<b>Door and window</b>					
entrance door	m <sup>2</sup>	4.32			steel security door
French windows	m <sup>2</sup>	11.80			aluminum window
window 1	m <sup>2</sup>	2.40			aluminum sliding window
window 2	pc	1.00			aluminum sliding window
Awning	pc	1.00			aluminum, 1500mm depth
<b>Bathroom</b>					
Unit bathroom	set	1.00			FRP
<b>Electric</b>					
socket and switch	pc	2.00			10A
electric wire	set	1.00			
wall light	pc	1.00			
PVC trunking	m	23.00			D20

Others					
Manufacturing cost	pc	1.00			
inland freight to port	pc	1.00			
Total, FOB CA					<b>Ideal as a Granny Flat or Extra Studio!</b>

Appearance



Floor ( many options)




Inner decoration( many Options)



Door, window




Inner wall panel

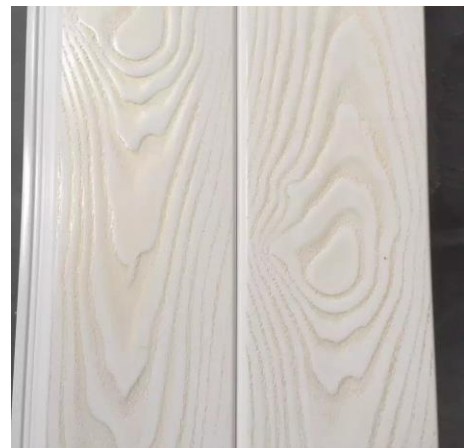

20 Ft. EcoHomes with Client added Deck



One of many Possible Layouts with Client added Deck

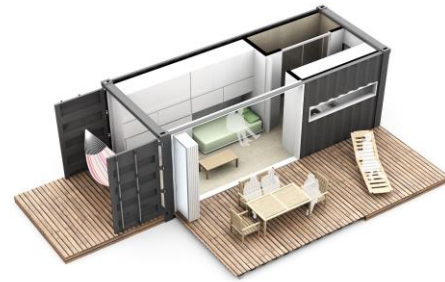



Vertical line of text, possibly a page number or separator.