



QUOTATION SHEET

Project name: 20 ft. container house ( 1 bathroom )					
Project dimension: 6058*2438*2896mm				Date: 3/28/2017	
Items	unit	qty.	unit price	amount	specification
<b>Container frame</b>					
welded container	pc	1.00			1) roof panel 2.0mm, wall panel 1.5mm, column 6mm 2) sea shipping standard painting 3) 18mm plywood for floor
<b>Roof</b>					
insulation	m <sup>2</sup>	14.40			75mm rock wool /120KG/m <sup>3</sup>
OSB board	m <sup>2</sup>	14.40			12mm
decoration board	m <sup>2</sup>	14.40			20mm eco-Wood ceiling
light	pc	2.00			LED light /32Wx2pcs , 8Wx1 pc
<b>Wall</b>					
insulation	m <sup>2</sup>	28.08			50mm rock wool/120KG/m <sup>3</sup>
OSB board	m <sup>2</sup>	28.08			12mm
inner wall panel	m <sup>2</sup>	28.08			20mm eco-Wood ceiling
<b>Floor</b>					
Wood floor	m <sup>2</sup>	14.40			12mm laminate floor
Skirting	m	30.80			H90mm PVC skirting
bottom insulation	m <sup>2</sup>	14.40			80mm PU spraying
<b>Door and window</b>					
entrance door	m <sup>2</sup>	4.32			steel security door
French windows	m <sup>2</sup>	11.80			aluminum window
window 1	m <sup>2</sup>	2.40			aluminum sliding window
window 2	pc	1.00			aluminum sliding window
Awning	pc	1.00			aluminum, 1500mm depth
<b>Bathroom</b>					
Unit bathroom	set	1.00			FRP
<b>Electric</b>					
socket and switch	pc	2.00			10A
electric wire	set	1.00			
wall light	pc	1.00			
PVC trunking	m	23.00			D20

Others					
Manufacturing cost	pc	1.00			
inland freight to port	pc	1.00			
Total, FOB CA					<b>Ideal as a Granny Flat or Extra Studio!</b>

Appearance



Floor ( many options)




Inner decoration( many Options)



Door, window




Inner wall panel

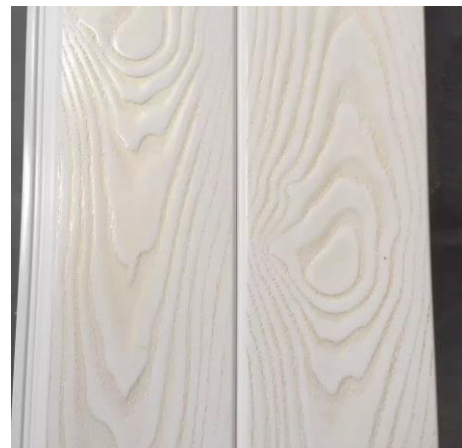

20 Ft. EcoHomes with Client added Deck



One of many Possible Layouts with Client added Deck

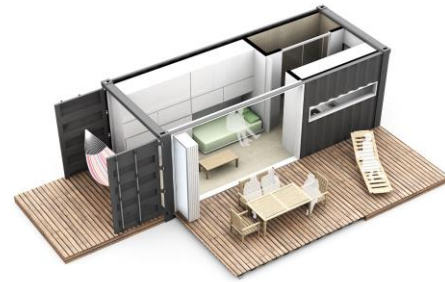



100